





Wärmetauscher Type W-

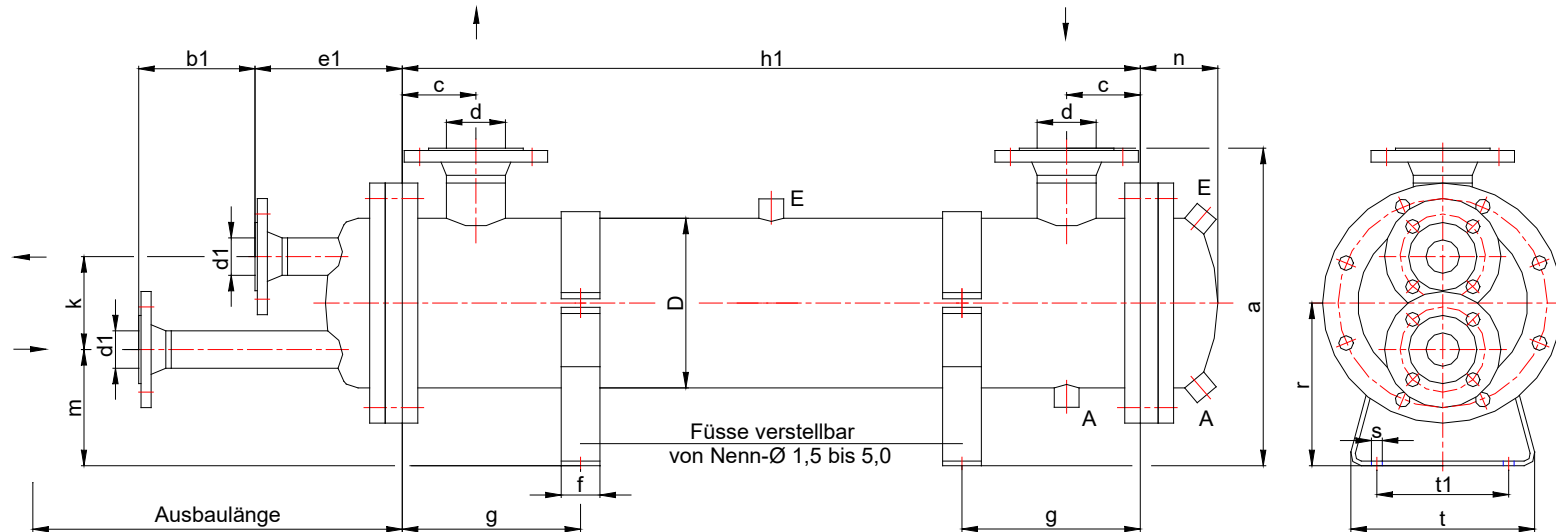

Nenn-Ø	1,5	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0	9,0
Ø D	168,3	193,7	219,1	273	323,9	355,6	406,4	457,2	508	550	600	650	700	750	800	900
d	DN 50	DN 65	DN 65	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125	DN 150	DN 150	DN 200	DN 200	DN 250	DN 250	DN 250
d1	DN 25	DN 32	DN 40	DN 50	DN 80	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150	DN 150	DN 200	DN 200	DN 250	DN 250
m	140	145	150	175	190	195	205	220	250	260	265	280	300	320	345	385
b1	120	130	150	160	180	-	-	-	-	-	-	-	-	-	-	-
c	90	95	95	95	115	125	125	145	150	170	170	200	200	230	240	250
n	90	95	100	115	130	135	145	155	170	175	190	200	210	220	230	260
a	370	390	410	490	550	590	630	690	770	810	850	930	970	1030	1090	1190
e1	170	180	190	210	230	240	250	260	280	300	310	320	330	340	370	390
k	100	110	120	150	180	210	230	260	280	300	330	380	380	400	410	430
r	190	200	210	250	280	300	320	350	390	410	430	470	490	520	550	600
f	50	50	50	60	60	60	60	60	70	75	75	75	75	85	85	85
g min	215	230	230	235	260	280	280	320	330	370	370	430	430	490	500	510
t	190	220	240	300	340	400	440	490	520	550	600	650	700	750	800	900
t1	120	150	170	220	260	300	340	390	420	480	520	570	620	670	720	820
s	14	14	14	14	14	18	18	18	18	18	23	23	23	23	23	23

E = Entlüftung
A = Ablass

Typenschlüssel:

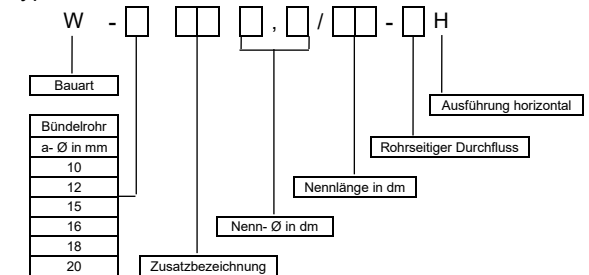

Nennlänge in dm	5	8	10	13,3	16	18	20	23,3	26,6	30	33	36	40
Länge h1 in mm	452	752	952	1282	1552	1752	1952	2282	2612	2952	3252	3552	3952
Ausbaulänge in mm	500	800	1000	1330	1600	1800	2000	2330	2660	3000	3300	3600	4000

Massabweichungen vorbehalten

Flanschanschlussmaße
nach EN 1092
bis DN 150 = PN 16
über DN 150 = PN 10